

SITE Church Lane, Normanton		DRAINAGE RUN F2 to F1	SET OUT BY M Howard	DATE 04/09/2026
PIPE DIAMETER 150 mm	DISTANCE F2 TO F1 42.5 m	LAYING DIRECTION Uphill from F2	ROCKER LENGTH 600 mm	

GRADIENT FOR PIPE LASER

+1.41 %

Laying uphill from F2. Set laser to +1.41 %.

Gradient	1 in 71
Rise over run	600 mm
Actual IL at F2	104.930 m
Fall in rocker	30 mm (actual high)

CHECK OK Laying uphill from F2 to F1: 600 mm over 42.5 m

MANHOLE LEVELS

MANHOLE F2		MANHOLE F1	
COVER LEVEL 106.500 m	DEPTH TO INVERT 1.600 m	COVER LEVEL 107.250 m	DEPTH TO INVERT 1.750 m
PROPOSED INVERT 104.900 m	ACTUAL INVERT 104.930 m	PROPOSED INVERT 105.500 m	ACTUAL INVERT —

JUNCTION SCHEDULE

REF	CHAINAGE FROM F2	BETWEEN JUNCTIONS	DIAMETER	SIDE	INVERT LEVEL
J1	6.20 m	6.20 m	100 mm	Left	104.988 m
J2	7.10 m	0.90 m	100 mm	Right	105.000 m
J3	7.90 m	0.80 m	100 mm	Left	105.012 m
J4	8.60 m	0.70 m	150 mm	Left	105.021 m
J5	21.00 m	12.40 m	100 mm	Right	105.196 m
J6	33.70 m	12.70 m	100 mm	Left	105.376 m
J7	34.40 m	0.70 m	100 mm	Right	105.386 m
J8	39.10 m	4.70 m	100 mm	Right	105.452 m
F1	42.50 m	3.40 m			105.500 m


Side is left or right looking from F2 towards F1 in the direction of laying.

NOTES


Laid from F2 uphill.

PLAN F2 TO F1

PLAN (SCHEMATIC) · LEFT / RIGHT LOOKING FROM F2 TOWARDS F1 IN THE LAYING DIRECTION

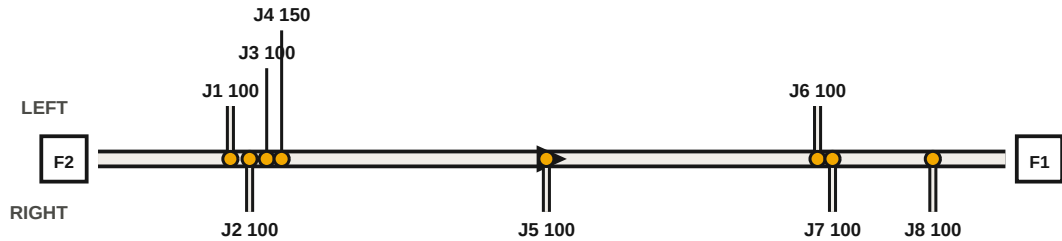

SECTION

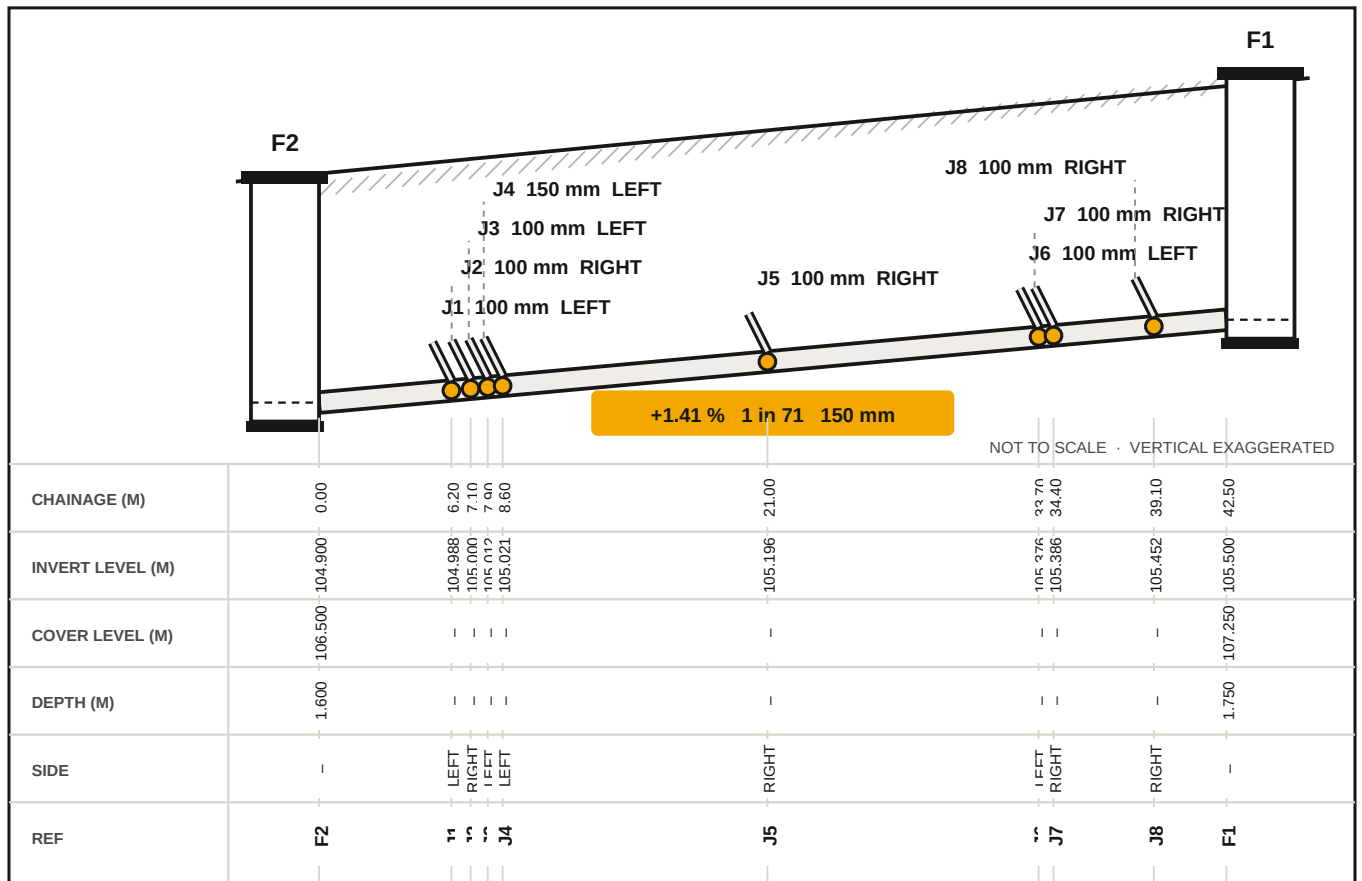

KEY

- Junction (branch off main run)
- ▬ Main run, width indicates diameter
- Laser gradient

PROJECT / SITE Church Lane, Normanton			DRAWING TITLE Pipe long section F2 to F1		
PIPE 150 mm	LASER GRADIENT +1.41 %		DISTANCE 42.5 m	LAYING uphill	REV A
SET OUT BY M Howard	DATE 04/09/2026		CHECKED BY (SIGNATURE)		DATE